

LOAD BREAK SWITCHES



from **\$22**

NEW!



Part Number	Price	AC1	UL HP Ratings (Motor FLA)				Dimensions (HxWxD)	Wire Size (stranded)
			Three Phase					
			208V	240V	480V	600V		
Rotary Switch								
FSLBS16	\$22	16A	3 (10A)	5 (15A)	10 (14A)	10 (11A)	2.68" x 1.77" x 2.99"	#14 - #4AWG
FSLBS25	\$24	25A	5 (16A)	7.5 (22A)	15 (21A)	20 (22A)	2.68" x 1.77" x 2.99"	#14 - #4AWG
FSLBS40	\$25	40A	7.5 (22A)	7.5 (22A)	20 (27A)	25 (27A)	2.68" x 1.77" x 2.99"	#14 - #4AWG
FSLBS63	\$35	63A	10 (30A)	20 (54A)	40 (52A)	40 (41A)	3.00" x 2.07" x 2.99"	#14 - #4AWG
FSLBS80	\$39	80A	15 (46A)	20 (54A)	40 (52A)	40 (41A)	3.00" x 2.07" x 2.99"	#14 - #4AWG
Toggle Switch								
FSLBST16	\$25	16A	3 (10A)	5 (15A)	10 (14A)	10 (11A)	2.68" x 1.77" x 2.87"	#14 - #1AWG
FSLBST25	\$26	25A	5 (16A)	7.5 (22A)	15 (21A)	20 (22A)	2.68" x 1.77" x 2.87"	#14 - #1AWG
FSLBST40	\$30	40A	7.5 (22A)	7.5 (22A)	20 (27A)	25 (27A)	2.68" x 1.77" x 2.87"	#14 - #1AWG
FSLBST63	\$42	63A	10 (30A)	20 (54A)	40 (52A)	40 (41A)	3.00" x 2.07" x 2.87"	#14 - #1AWG
FSLBST80	\$47	80A	15 (46A)	20 (54A)	40 (52A)	40 (41A)	3.00" x 2.07" x 2.87"	#14 - #1AWG

The FSLBS Load Break Switch is a compact industrial-grade switch capable of making and breaking loads up to 600V. It is UL508 Listed for use as a motor disconnect and has a double break on each phase. The patented design of this rotary disconnect allows actuation from the front or from either side. This feature permits unrivaled mounting flexibility. The disconnect can be surface mounted, DIN-rail mounted, or door-mounted. An assortment of mating handles, shafts, and auxiliary contacts is available to accommodate most installation requirements. Toggle and rotary styles have a built-in pad-lockable hasp. The external handles are triple padlockable. The integrated box terminals are finger-safe to IP20 standards.



Accessories

Handles	Description	Price
FSHD	Direct Mount Knob - BLACK (does not use shaft)	\$1
FSH00BR	Rotary Pistol Handle, NEMA 3R/12, Black (fits FSLBS)	\$10
FSH00RR	Rotary Pistol Handle, NEMA 3R/12, Red/Yellow (fits FSLBS)	\$11
FSH00BR4	Rotary Pistol Handle, NEMA 4/4X, Black (fits FSLBS)	\$12
FSH00RR4	Rotary Pistol Handle, NEMA 4/4X, Red/Yellow (fits FSLBS)	\$13
FSH0BR	Extended Rotary Pistol Handle, NEMA 3R/12, Black (fits FSLBS or FSSC)	\$12
FSH0RR	Extended Rotary Pistol Handle, NEMA 3R/12, Red/Yellow (fits FSLBS or FSSC)	\$13
FSH0BR4	Extended Rotary Pistol Handle, NEMA 4/4X, Black (fits FSLBS or FSSC)	\$15
FSH0RR4	Extended Rotary Pistol Handle, NEMA 4/4X, Red/Yellow (fits FSLBS or FSSC)	\$15
FSDMK	Door Mounting Kit for FSLBS 16A to 80A (short shaft and all mounting hardware included)	\$7
Shafts	Description	Price
FS150	6 Inches / 150MM Shaft for S0, S00 ON FSLBS, includes brass collar and shaft adapter	\$3
FS200	7.9 Inches / 200MM Shaft for S0, S00 ON FSLBS, includes brass collar and shaft adapter	\$4
FS320	12.6 Inches / 320MM Shaft for S0, S00 ON FSLBS, includes brass collar and shaft adapter	\$5
Auxiliary Contacts	Description	Price
FSACNONC	Auxiliary Contact NO+NC FOR FSLBS & FSLBST	\$14
FSACNONO	Auxiliary Contact 2 NO FOR FSLBS & FSLBST	\$14
Miscellaneous	Description	Price
FSTS40	Terminal Shrouds for 16A, 25A, and 40A FOR FSLBS & FSLBST	\$4
FSTS80	Terminal Shrouds for 63A and 80A FOR FSLBS & FSLBST	\$5

Features

- Terminals rated for 2 wires
- Front or either side operation
- Padlockable (all models)
- Defeatable (external rotary)
- DIN-rail, surface, or door mounting
- Choice of handles and shafts
- Side-mount auxiliary contacts (Max. four)
- Double breaking
- UL508 Listed

Assembly

1. Direct handle (does not use shaft)
2. Door interlocked external handle (defeatable)
3. Shaft for external operation
4. Terminal shrouds
5. Switch body
6. NO/NC or NO/NO aux. contacts



from **\$73**

NEW!

Features

- IP65
- UL 508
- Triple padlockable
- NEMA 1, 3, 3R, 4, 4X, 12
- Non-defeatable rotary handle



Enclosed Load Break Switches

Part Number	AC1	UL HP Rating (FLA)			Dimensions (H x W x D)	Price
		Three-Phase				
		240V	480V	600V		
EJFS303RS0	30A	7.5 (22A)	20 (27A)	25 (27A)	6.38" x 3.90" x 4.45" (162 x 99 x 113mm)	\$73
EJFS603RS0	60A	20 (54A)	40 (52A)	40 (41A)	8.27" x 4.94" x 4.45" (210 x 125.5 x 113mm)	\$107



FREE Ground Shipping!
for online orders over \$500



NON-FUSIBLE DISCONNECT SWITCHES



FSSC60

from

\$73

Part Number	Price	AC1	UL HP Ratings (Motor FLA)			Dimensions (HxWxD)	Wire Size (stranded)
			Three Phase				
			240V	480V	600V		
Rotary Switch							
FSSC30	\$73	30A	10 (28A)	20 (27A)	25 (27A)	4.91" x 3.07" x 3.19"	#12 - 2/0AWG (1)
FSSC60	\$88	60A	20 (54A)	40 (52A)	50 (52A)	4.91" x 3.07" x 3.19"	#12 - 2/0AWG (1)
FSSC100	\$105	100A	20 (54A)	50 (65A)	50 (52A)	4.91" x 3.07" x 3.19"	#12 - 2/0AWG (1)

Accessories

Handles	Description	Price
FSHD3	Direct Mount Knob - BLACK (does not use shaft)	\$5
FSH0BR	Extended Rotary Pistol Handle, NEMA 3R/12, Black (fits FSLBS or FSSC)	\$12
FSH0RR	Extended Rotary Pistol Handle, NEMA 3R/12, Red/Yellow (fits FSLBS or FSSC)	\$13
FSH0BR4	Extended Rotary Pistol Handle, NEMA 4/4X, Black (fits FSLBS or FSSC)	\$15
FSH0RR4	Extended Rotary Pistol Handle, NEMA 4/4X, Red/Yellow (fits FSLBS or FSSC)	\$15
Shafts	Description	Price
FS150	6 Inches / 150mm shaft for S0, S00 ON FSLBS, includes brass collar and shaft adapter	\$3
FS200	7.9 Inches / 200mm shaft for S0, S00 ON FSLBS, includes brass collar and shaft adapter	\$4
FS320	12.6 Inches / 320mm shaft for S0, S00 ON FSLBS, includes brass collar and shaft adapter	\$5
Auxiliary Contacts	Description	Price
FSACNONC	Auxiliary Contact NO+NC for FSSC30, FSSC60, or FSSC100	\$14
FSACNONO	Auxiliary Contact 2 NO for FSSC30, FSSC60, or FSSC100	\$14
Miscellaneous	Description	Price
FSSCTS	3-pole terminal shrouds for FSSC30, FSSC60, or FSSC100 (2 per pkg)	\$13
FSSCTS1	1-pole terminal shrouds for FSSC30, FSSC60, or FSSC100 (2 per pkg)	\$7


Ferraz Shawmut's FSSC series of heavy-duty, non-fused switches is an economical and space-saving alternative to traditional larger switches. They are UL listed and designed to satisfy UL98 and UL508 standards. They are appropriate for service entrance and other demanding applications.

Features

- Front, left side, or right side operation
- Padlockable (all models)
- Defeatable (external rotary)
- DIN-rail, surface, or door mounting
- Choice of handles and shafts
- Optional auxiliary contacts (Max. four modules, eight contacts)
- Double breaking silver-plated contacts
- UL Listed
- SCCR: 100kA @ 480V with Class J fuses

Assembly

1. Direct handle (does not use shaft)
2. Door interlocked external handle (defeatable)
3. Shaft for external operation
4. Terminal shrouds
5. Switch body
6. NO/NC or NO/NO aux. contacts

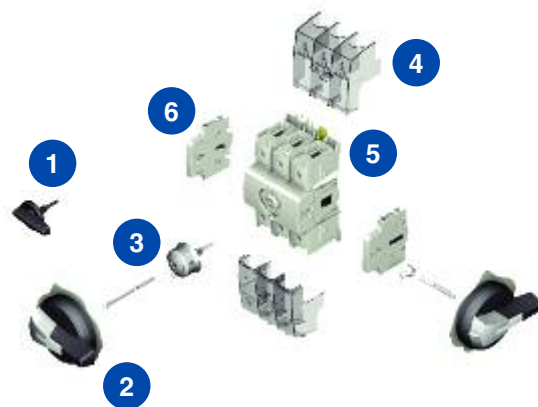

NON-FUSIBLE DISCONNECT SWITCHES



Non-Fusible, Front operated, 60 to 400A

Part Number	Description	Price
SCV60U	Front-operated disconnect, non-fusible, 3-pole, visible blade contacts, integral lugs, 600V, 60A	\$92
SCV100U	Front-operated disconnect, non-fusible, 3-pole, visible blade contacts, integral lugs, 600V, 100A	\$105
SCV200U	Front-operated disconnect, non-fusible, 3-pole, visible blade contacts, 600V, 200A	\$254
SCV400U	Front-operated disconnect, non-fusible, 3-pole, visible blade contacts, 600V, 400A	\$581
Accessories		
HSPBL	S-type Pistol Handle, Long, NEMA 1, 3R, 12, IP54, BLACK	\$41
HSPRL	S-type Pistol Handle, Long, NEMA 1, 3R, 12, IP54, RED/YELLOW	\$41
HSPB4L	S-type Pistol Handle, Long, NEMA 1, 3R, 12, 4, 4X, IP65, BLACK	\$66
HSPR4L	S-type Pistol Handle, Long, NEMA 1, 3R, 12, 4, 4X, IP65, RED/YELLOW	\$66
SS200-10	Shaft, 7.9" (200mm)	\$12
SS320-10	Shaft, 12.6" (320mm)	\$19
SS400-10	Shaft, 15.7" (400mm)	\$23
SS500-10	Shaft, 19.7" (500mm)	\$26
NFPA791	Operator allows operation and padlock of switch when enclosure door is open	\$73
TL200	Terminal Lug Kit, 6 lugs per kit, 200A	\$32
TL400	Terminal Lug Kit, 6 lugs per kit, 400A	\$82
TS200SC	Terminal shroud kit, 3-pole, line or load side, 200A	\$66
TS400SC	Terminal shroud kit, 3-pole, line or load side, 400A	\$44
AC3	Snap-on auxiliary contact block, 1 N.O., 10A, 600V	\$10
AC4	Snap-on auxiliary contact block, 1 N.C., 10A, 600V	\$10
AC5	Side mount auxiliary contact block, 1 N.O / 1 N.C.	\$43
AC6	Side mount auxiliary contact block, 2 N.O / 2 N.C.	\$43

Ferraz Shawmut's non-fused disconnect switches are manually operated and extremely durable. These heavy-duty switches are designed to meet the UL98 standard for up to 600V. These disconnects "make and break" circuits under load and are suitable for "service entrance" applications. An array of handles is available to meet OSHA padlocking requirements, NEMA configurations, and NFPA 79 requirements.

Features

- Service entrance rated, UL98
- 600 VAC, 250 VDC
- Visible blade contacts up to 400 A
- Line side shrouding supplied with switch
- External or direct operation handles
- Flange operation (with side operated switches)
- Padlockable handles
- Up to 200 kA Short Circuit Rating with Fuses

Accessories

- Rotary handles and shafts (front operated models)
- Flange handles and cables (side operated models)
- Lug kits
- Terminal shroud kits
- Auxiliary contact blocks

Non-Fusible, Front operated, 400 to 1200A

Part Number	Description	Price
SC400	Front-operated disconnect, non-fusible, 3-pole, 600V, 400A	\$612
SC600	Front-operated disconnect, non-fusible, 3-pole, 600V, 600A	\$948
SC800	Front-operated disconnect, non-fusible, 3-pole, 600V, 800A	\$1,810
SC1000	Front-operated disconnect, non-fusible, 3-pole, 600V, 1000A	\$2,327
SC1200	Front-operated disconnect, non-fusible, 3-pole, 600V, 1200A	\$2,930
Accessories		
HSPBEL	S-type Pistol Handle, Extra Long, NEMA 1, 3R, 12, IP54, BLACK	\$85
HSPREL	S-type Pistol Handle, Extra Long, NEMA 1, 3R, 12, IP54, RED/YELLOW	\$85
HSPB4EL	S-type Pistol Handle, Extra Long, NEMA 1, 3R, 12, 4, 4X, IP65, BLACK	\$87
HSPR4EL	S-type Pistol Handle, Extra Long, NEMA 1, 3R, 12, 4, 4X, IP65, RED/YELLOW	\$87
HSTB4	S-type Double Pistol Handle, NEMA 1, 3R, 12, 4, 4X, IP65, BLACK	\$182
HSTR4	S-type Double Pistol Handle, NEMA 1, 3R, 12, 4, 4X, IP65, RED/YELLOW	\$182
SS200-15	Shaft, 7.9" (200mm)	\$17
SS320-15	Shaft, 12.6" (320mm)	\$19
SS400-15	Shaft, 15.7" (400mm)	\$21
HADB5U	Pistol handle, direct front operation	\$52
TL400	Terminal Lug Kit, 6 lugs per kit, 400A	\$82
TL600	Terminal Lug Kit, 6 lugs per kit, 600A	\$164
TL800	Terminal Lug Kit, 6 lugs per kit, 800A	\$211
TL1200	Terminal Lug Kit, 6 lugs per kit, 1000 & 1200A	\$376
TS600SC	Terminal shroud kit, 3-pole, line or load side, 400 & 600A*	\$62
TS1200SC	Terminal shroud kit, 3-pole, line or load side, 800, 1000, & 1200A*	\$61
ACHSC	Auxiliary contacts holder, accommodates up to 4 aux. contacts	\$13
AC3	Snap-on auxiliary contact block, 1 N.O., 10A, 600V	\$10
AC4	Snap-on auxiliary contact block, 1 N.C., 10A, 600V	\$10
SWL01	Padlocking device, provides lockout when enclosure door is open (padlock not included)	\$129

* One terminal shroud is supplied with switch



FREE Ground Shipping!*
for online orders over \$500



Non-Fusible Disconnect Switches - Side Operated (cont'd)

Non-Fusible, Side operated, 60 to 400A

Ferraz
Shawmut

from

\$125



Features

- Service entrance rated, UL98
- 600 VAC, 250 VDC
- Visible blade contacts up to 400 A
- Line side shrouding supplied with switch
- External or direct operation handles
- Flange operation (with side operated switches)
- Padlockable handles
- Up to 200 kA Short Circuit Rating with Fuses

Accessories

- Rotary handles and shafts (front operated models)
- Flange handles and cables (side operated models)
- Lug kits
- Terminal shroud kits
- Auxiliary contact blocks

Part Number	Description	Price
SCV60SO	Side-operated disconnect, non-fusible, 3-pole, integral lugs, 600V, 60A	\$125
SCV100SO	Side-operated disconnect, non-fusible, 3-pole, integral lugs, 600V, 100A	\$145
SCV200SO	Side-operated disconnect, non-fusible, 3-pole, 600V, 200A	\$352
SCV400SO	Side-operated disconnect, non-fusible, 3-pole, 600V, 400A	\$627
Accessories		
HAF-OP1	Cable flange operated handle, NEMA 1, 3R, 4, 12, IP54	\$47
HAF-OP2	Cable flange operated handle, NEMA 4/4X, IP65	\$81
HAF-MECH	Cable operated mechanism	\$120
HAFC36	Cable for flange operation, 36"	\$156
HAFC60	Cable for flange operation, 60"	\$185
HAFC120	Cable for flange operation, 120"	\$239
HADB4	Pistol handle for direct side operation, BLACK	\$36
TL200	Terminal Lug Kit, 6 lugs per kit, 200A	\$32
TL400	Terminal Lug Kit, 6 lugs per kit, 400A	\$82
TS200SC	Terminal shroud kit, 3-pole, line or load side, 200A*	\$66
TS400SC	Terminal shroud kit, 3-pole, line or load side, 400A*	\$44
AC5	Side mount auxiliary contact block, 1 N.O / 1 N.C.	\$43
AC6	Side mount auxiliary contact block, 2 N.O / 2 N.C.	\$43

* One terminal shroud is supplied with switch



Non-Fused Disconnect General Specifications

Part Number	SCV60U SCV60SO	SCV100U SCV100SO	SCV200U SCV200SO	SCV400U SCV400SO	SC400	SC600	SC800	SC1000	SC1200	
Rating	60A	100A	200A	400A	400A	600A	800A	1000A	1200A	
Operating voltage	600V	600V	600V	600V	600V	600V	600V	600V	600V	
UL Rating Three Phase (HP/FLA)	208 VAC	15 / 48.5	25 / 78.5	50 / 150	100 / 286	125 / 360	150 / 415	200 / 554	200 / 554	200 / 554
	240 VAC	15 / 42	30 / 80	60 / 154	125 / 312	125 / 312	200 / 480	200 / 602	200 / 602	200 / 602
	480 VAC	30 / 40	60 / 77	125 / 156	250 / 302	250 / 302	400 / 447	500 / 590	500 / 590	500 / 590
	600 VAC	50 / 52	75 / 77	150 / 144	350 / 336	350 / 336	350 / 336	500 / 472	500 / 472	500 / 472
	125 VDC (1)	3 / 25(1)	7.5 / 58(1)	15 / 112(1)	20 / 148(1)	20 / 148(1)	20 / 148(1)	-	-	-
250 VDC (2)	10 / 38(2)	20 / 72(2)	40 / 140(2)	50 / 173(2)	50 / 173(2)	50 / 173(2)	-	-	-	
Short circuit rating with fuses (SCCR)	200kA	200kA	200kA	200kA	200kA	200kA	100kA	100kA	100kA	
Dimensions (HxWxD) ⁽³⁾	5.87"x6.69"x3.89"		8.13"x9.52"x3.42"	14.31"x11.93"x4.92"	12.6"x11.02"x5.51"			13"x14.64"x5.51"		
Terminal lugs kit	Integral	Integral	Optional (6)	Optional (6)	optional (6)	optional (6)	optional (6)	optional (12)	optional (12)	
Wire range AWG (# of wire holes per lug)	#3-#10 (1)	#3-#10 (1)	3 / 0-#6 (1)	600 kcmil-#2 (1)	600 kcmil-#2 (1)	600 kcmil-#2 (2)	600 kcmil-#2 (3)	600 kcmil-#2 (4)	600 kcmil-#2 (4)	

(1) 2 pole in series

(2) 3 pole in series

(3) Dimensions are for 3 pole, front operated switches

FUSIBLE DISCONNECT SWITCHES



Part Number	FBJ303X	FBJ603X	FBJ1003X	FBJ2003X
Price	\$160	\$171	\$213	\$565
Rating	30A	60A	100A	200A
Number of poles	Three			
Fuse type	Class J			
Max fuse rating (A)	30	60	100	200
Operating voltage	600V			
UL Rating Three Phase (HP/FLA)	208 VAC	5 / 17.5	15 / 48.5	25 / 78.5
	240 VAC	7.5 / 22	15 / 42	30 / 80
	480 VAC	15 / 21	30 / 40	60 / 77
	600 VAC	20 / 22	50 / 52	75 / 77
250 VDC (1)	5 / 20	10 / 38	20 / 38	-
Short circuit rating with fuses (SCCR)	200kA	100kA	200kA	200kA
Dimensions (HxWxD) (2)	5.35"x5.88"x4.84"	5.35"x5.88"x4.84"	7.32"x5.88"x4.84"	7.68"x7.72"x5.12"
Terminal lugs kit	Integral	Integral	Integral	Optional (6)
Wire range AWG (# of wire holes per lug)	#6 - #10 (1)	#6 - #10 (1)	#1 - #12 (1)	300 kcmil-#6 (1)


(1) Three pole in series
(2) Dimensions are for 3 pole, front operated switches

The rugged FBX series of small footprint fused switches are UL98 listed for service entrance applications. Units up to 100A are designed with box terminals, eliminating the need for separate lugs or terminal shrouds. For wiring convenience, a parallel set of 14 AWG electrical taps has been provided to power control circuits and pilot devices.

Features

- Front operation
- Double break contacts
- Rated for service entrance applications
- 14 AWG parallel power taps for control circuit
- 30A and 60A sizes
 - Fuse pull-out handle
 - Box terminals
 - DIN rail mountable
- Integral fuse covers (all sizes)
- Lock-out / tag-out hasp
- Accommodates up to four auxiliary contact blocks

Accessories		
Front Operation Accessories		
HSPBL	S-type Pistol Handle, Long, NEMA 1, 3R, 12, IP54, BLACK	\$41
HSPRL	S-type Pistol Handle, Long, NEMA 1, 3R, 12, IP54, RED/YELLOW	\$41
HSPB4L	S-type Pistol Handle, Long, NEMA 1, 3R, 12, 4, 4X, IP65, BLACK	\$66
HSPR4L	S-type Pistol Handle, Long, NEMA 1, 3R, 12, 4, 4X, IP65, RED/YELLOW	\$66
HSPB4LT	S-type Pistol Handle with test function, Long, NEMA 1, 3R, 12, 4, 4X, IP65, BLACK	\$71
HSPR4LT	S-type Pistol Handle with test function, Long, NEMA 1, 3R, 12, 4, 4X, IP65, RED/YELLOW	\$71
SS200-10	Shaft, 7.9" (200mm)	\$12
SS320-10	Shaft, 12.6" (320mm)	\$19
SS400-10	Shaft, 15.7" (400mm)	\$23
NFPA791	Front operation kit allows operation and padlocking of switch when enclosure door is open	\$73
Miscellaneous Accessories		
TL200X6	Terminal Lug Kit, 6 lugs per kit, 200A	\$67
TS2003FBX	Terminal shroud kit, 3-pole, line or load side, 200A	\$119
SL60	Shorting links kit, 3 links per kit, 60A	\$10
SL100	Shorting links kit, 3 links per kit, 100A	\$10
SL200	Shorting links kit, 3 links per kit, 200A	\$30
AC3	Snap-on auxiliary contact block, 1 N.O., 10A, 600V	\$10
AC4	Snap-on auxiliary contact block, 1 N.C., 10A, 600V	\$10
AC5	Side mount auxiliary contact block, 1 N.O / 1 N.C.	\$43
AC6	Side mount auxiliary contact block, 2 N.O / 2 N.C.	\$43

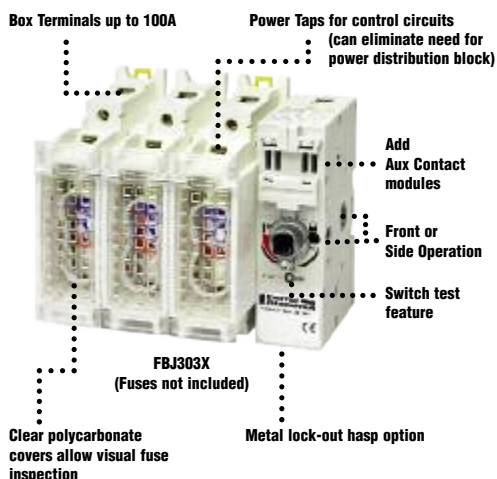

FREE Ground Shipping!*
for online orders over \$500



FUSIBLE DISCONNECT SWITCHES

Ferraz
Shawmut

from
\$123



Fuses not included



Ferraz Shawmut FUSERBLOC disconnect switches are extremely durable, manually operated, fusible disconnect switches. The switches employ double break contacts per pole that ensure complete isolation of the fuse when the switch is in the OFF position. With safety in mind, all FUSERBLOC switches are supplied with fuse covers and line side shrouding as a standard feature. These switches provide the ultimate in short circuit protection when used with Ferraz Shawmut's Class J or L fuses. These heavy-duty switches are designed with the most up-to-date disconnect fuse and switch technology available. Designed to meet the UL98 or UL489 standard, the FUSERBLOC gives you the product that "makes and breaks" power circuits under load.

Features

- 600 VAC, 250VDC
- Up to 200 kA Short Circuit current Rating (SCCR) with Class J, or L Fuses
- Double break contacts per pole up to 800 A
- Touch safe fuse covers/ line shrouding standard
- Service Entrance Rated, UL98
- Test positions available up to 400 A

Applications

- Service entrance or main panel disconnects up to 600VAC, 800A
- "Make and Break" power circuit on load
- Fusible isolation switches
- NFPA 79 solutions

Recommended fuse usage

- FBJ use with AJT, A4J, HSJ
- FBL use with A4BQ, A4BY, A4BT

Accessories

- Rotary handles and shafts (front operated models)
- Flange handles and cables (side operated models)
- Lug kits
- Terminal shroud kits
- Shorting links
- Auxiliary contact blocks

Fusible, Front operated, 30 to 400A

Part Number	Description	Price
FBCC30U	Front-operated disconnect, fusible, 3-pole, CC-type fuse class, integral lugs, 600V, 30A	\$123
FBJ60U	Front-operated disconnect, fusible, 3-pole, J-type fuse class, integral lugs, 600V, 60A	\$156
FBJ100U	Front-operated disconnect, fusible, 3-pole, J-type fuse class, 600V, 100A	\$213
FBJ200U	Front-operated disconnect, fusible, 3-pole, J-type fuse class, 600V, 200A	\$565
FBJ400U	Front-operated disconnect, fusible, 3-pole, J-type fuse class, 600V, 400A	\$761
Accessories		
HSPBL	S-type Pistol Handle, Long, NEMA 1, 3R, 12, IP54, BLACK	\$41
HSPRL	S-type Pistol Handle, Long, NEMA 1, 3R, 12, IP54, RED/YELLOW	\$41
HSPB4L	S-type Pistol Handle, Long, NEMA 1, 3R, 12, 4, 4X, IP65, BLACK	\$66
HSPR4L	S-type Pistol Handle, Long, NEMA 1, 3R, 12, 4, 4X, IP65, RED/YELLOW	\$66
HSPB4LT	S-type Pistol Handle with test function, Long, NEMA 1, 3R, 12, 4, 4X, IP65, BLACK	\$71
HSPR4LT	S-type Pistol Handle with test function, Long, NEMA 1, 3R, 12, 4, 4X, IP65, RED/YELLOW	\$71
SS200-10	Shaft, 7.9" (200mm)	\$12
SS320-10	Shaft, 12.6" (320mm)	\$19
SS400-10	Shaft, 15.7" (400mm)	\$23
SS500-10	Shaft, 19.7" (500mm)	\$26
NFPA791	Allows operation and padlock of switch when enclosure door is open	\$73
TL100	Terminal Lug Kit, 6 lugs per kit, 100A	\$10
TL200	Terminal Lug Kit, 6 lugs per kit, 200A	\$32
TL400	Terminal Lug Kit, 6 lugs per kit, 400A	\$82
TS100FB	Terminal shroud kit, 3-pole, line or load side, 100A	\$41
TS200FB	Terminal shroud kit, 3-pole, line or load side, 200A	\$66
TS400FB	Terminal shroud kit, 3-pole, line or load side, 400A	\$44
SL60	Shorting links kit, 3 links per kit, 60A	\$10
SL100	Shorting links kit, 3 links per kit, 100A	\$10
SL200	Shorting links kit, 3 links per kit, 200A	\$30
SL400	Shorting links kit, 3 links per kit, 400A	\$30
AC3	Snap-on auxiliary contact block, 1 N.O., 10A, 600V	\$10
AC4	Snap-on auxiliary contact block, 1 N.C., 10A, 600V	\$10
AC5	Side mount auxiliary contact block, 1 N.O / 1 N.C.	\$43
AC6	Side mount auxiliary contact block, 2 N.O / 2 N.C.	\$43

Fusible, Front operated, 600 to 800A

Part Number	Description	Price
FBJ600U	Front-operated disconnect, 3-pole, J-type fuse class, 600V, 600A	\$1,187
FBL800U	Front-operated disconnect, 3-pole, L-type fuse class, 600V, 800A	\$1,949
Accessories		
HSPBEL	S-type Pistol Handle, Extra Long, NEMA 1, 3R, 12, IP54, BLACK	\$85
HSPREL	S-type Pistol Handle, Extra Long, NEMA 1, 3R, 12, IP54, RED/YELLOW	\$85
HSPB4EL	S-type Pistol Handle, Extra Long, NEMA 1, 3R, 12, 4, 4X, IP65, BLACK	\$87
HSPR4EL	S-type Pistol Handle, Extra Long, NEMA 1, 3R, 12, 4, 4X, IP65, RED/YELLOW	\$87
HSTB4	S-type Double Pistol Handle, NEMA 1, 3R, 12, 4, 4X, IP65, BLACK	\$182
HSTR4	S-type Double Pistol Handle, NEMA 1, 3R, 12, 4, 4X, IP65, RED/YELLOW	\$182
SS200-12	Shaft, 7.9" (200mm)	\$17
SS320-12	Shaft, 12.6" (320mm)	\$19
SS400-12	Shaft, 15.7" (400mm)	\$23
SS500-12	Shaft, 19.7" (500mm)	\$25
HADB5U	Pistol handle, direct front operation	\$52
TL600	Terminal Lug Kit, 6 lugs per kit, 600A	\$164
TL800	Terminal Lug Kit, 6 lugs per kit, 800A	\$211
TS800U	Terminal shroud kit, 3-pole, line and load side, 600A & 800A	\$65
AC3	Snap-on auxiliary contact block, 1 N.O., 10A, 600V	\$10
AC4	Snap-on auxiliary contact block, 1 N.C., 10A, 600V	\$10



To order call **1.800.972.0436** or visit **factorymation.com**

No Games, No Gimmicks...

...Just Great Products at Great Prices!!!

Fusible Disconnect Switches - Side Operated



from **\$165**



Fuses not included



Fusible, Side operated, 30 to 400A

Part Number	Description	Price
FBCC30SO	Side-operated disconnect, fusible, 3-pole, CC-type fuse class, integral lugs, 600V, 30A	\$165
FBJ60SO	Side-operated disconnect, fusible, 3-pole, J-type fuse class, 600V, 60A	\$223
FBJ100SO	Side-operated disconnect, fusible, 3-pole, J-type fuse class, 600V, 100A	\$271
FBJ200SO	Side-operated disconnect, fusible, 3-pole, J-type fuse class, 600V, 200A	\$779
FBJ400SO	Side-operated disconnect, fusible, 3-pole, J-type fuse class, 600V, 400A	\$1,126
Accessories		
HAF-OP1	Cable flange operated handle, NEMA 1, 3R, 4, 12, IP54	\$47
HAF-OP2	Cable flange operated handle, NEMA 4/4X, IP65	\$81
HAF-MECH	Cable operated mechanism	\$120
HAFC36	Cable for flange operation, 36"	\$156
HAFC60	Cable for flange operation, 60"	\$185
HAFC120	Cable for flange operation, 120"	\$239
HADB4	Pistol handle for direct side operation (J-type disconnects, only), BLACK	\$36
TL100	Terminal Lug Kit, 6 lugs per kit, 100A	\$10
TL200	Terminal Lug Kit, 6 lugs per kit, 200A	\$32
TL400	Terminal Lug Kit, 6 lugs per kit, 400A	\$82
TS100FB	Terminal shroud kit, 3-pole, line or load side, 100A	\$41
TS200FB	Terminal shroud kit, 3-pole, line or load side, 200A	\$66
TS400FB	Terminal shroud kit, 3-pole, line or load side, 400A	\$44
SL60	Shorting links kit, 3 links per kit, 60A	\$10
SL100	Shorting links kit, 3 links per kit, 100A	\$10
SL200	Shorting links kit, 3 links per kit, 200A	\$30
SL400	Shorting links kit, 3 links per kit, 400A	\$30
AC5	Side mount auxiliary contact block, 1 N.O / 1 N.C.	\$43
AC6	Side mount auxiliary contact block, 2 N.O / 2 N.C.	\$43



Fused Disconnect General Specifications

Part Number	FBCC30U FBCC30SO	FBJ60U FBJ60SO	FBJ100U FBJ100SO	FBJ200U FBJ200SO	FBJ400U FBJ400SO	FBJ600U FBJ600SO	FBL800U
Rating	30A	60A	100A	200A	400A	600A	800A
Fuse type	CC	J	J	J	J	J	L
Max fuse rating (A)	30	60	100	200	400	600	800
Operating voltage	600V	600V	600V	600V	600V	600V	600V
UL Rating Three Phase (HP/FLA)	208 VAC	5 / 17.5	15 / 48.5	25 / 78.5	50 / 150	100 / 286	-
	240 VAC	7.5 / 22	15 / 42	30 / 80	60 / 154	125 / 312	200 / 480
	480 VAC	15 / 21	30 / 40	60 / 77	125 / 156	250 / 302	400 / 477
	600 VAC	20 / 22	50 / 52	75 / 77	150 / 144	350 / 336	500 / 472
	125 VDC (1)	3 / 25	3 / 25	7.5 / 58	15 / 112	20 / 148	-
250 VDC (2)	5 / 20	10 / 38	20 / 38	40 / 140(1)	50 / 173(1)	-	
Short circuit rating with fuses (SCCR)	100kA	200kA	200kA	200kA	200kA	200kA	200kA
Dimensions (HxWxD) (3)	5.87"x5.63"x3.89"	5.87"x6.72"x5.62"	7.19"x8.26"x5.63"	8.13"x9.44"x6"	14.31"x11.93"x5.56"	11.86"x14.31"x11.42"	11.86"x14.31"x11.42"
Terminal lugs kit	Integral	Integral	Optional	Optional	Optional	Optional	Optional
Wire range AWG (# of wire holes per lug)	#10-#14 (1)	#3-#10 (1)	2 / 0-#14 (1)	3 / 0-#6 (1)	600 kcmil-#2 (1)	600 kcmil-#2 (2)	600 kcmil-#2 (2)

(1) 2 pole in series

(2) 3 pole in series

(3) Dimensions are for 3 pole, front operated switches



FREE Ground Shipping!
for online orders over \$500

