


WIRING SOLUTIONS

Universal Spiral Wrap



NEW! from **7¢** per foot

Nominal O.D. Size	I.D. Size Range	Feet per carton	Natural	Price	White	Price
1/8"	1/16" to 1/2"	160	SPIRALITE-P1	\$11	SPIRALITE-PA1	\$16
1/4"	1/4" to 2"	80	SPIRALITE-P2	\$12	SPIRALITE-PA2	\$16
3/8"	3/8" to 3"	80	SPIRALITE-P3	\$18	SPIRALITE-PA3	\$29
1/2"	1/2" to 4"	65	SPIRALITE-P4	\$24	SPIRALITE-PA4	\$37

Features

- Fast and economical grouping of wire bundles
- Flexible connections between panel and door

Colors

- Natural - translucent polyethylene
- White - self-extinguishing polyethylene

Braided Expandable Sleeving



from **24¢** per foot

Part Number	I.D. Inches	Diameter Range	Feet per carton	Price
TY-5B	.197" (5mm)	.157" (4mm) to .472" (12mm)	325	\$77
TY-10B	.375" (10mm)	.315" (8mm) to .866" (22mm)	325	\$144
TY-20B	.750" (20mm)	.630" (16mm) to 1.378" (35mm)	164	\$126
TY-30B	1.125" (30mm)	.984" (25mm) to 1.890" (48mm)	164	\$178
TY-50B	2.000" (50mm)	1.575" (40mm) to 2.835" (72mm)	164	\$259

Features

- Black, halogen free, polyester
- -50°C to 150°C operating temperature
- Self-extinguishing per UL 94V2

I-Flex Liquid Tight Tubing



from **29¢** per foot



The new I-Flex liquid-tight flexible tubing provides electrical wire protection during routing applications. I-Flex is designed for maximum flexibility and can be used in extremely tight quarters. Provides excellent tensile strength and has a smooth interior wall for pull-out protection.

Features

- Soft PVC with rigid PVC external spiral construction
- Available in light gray or black
- IP 65-rated for liquid-tight environmental seal
- Suitable for indoor and outdoor applications
- Resists solvents, grease, oil, alcohol, gasoline, and saltwater
- Quick re-entry for cable repair or rerouting
- Operating temperature -4°F to +140°F
- UL recognized, CE certified

Applications

- Locations where oil resistance, water ingress, or ultraviolet light is a problem
- Protection of fiber optic cable
- Installing instrumentation or control cable
- Wire harness protection
- Packaging equipment
- Marine applications

Liquid Tight Conduit

Nominal ID	Actual ID	Coil Length	Gray	Black	Price
3/8"	0.47"	98' (30M)	GUA-12G	GUA-12K	\$28
1/2"	0.63"	98' (30M)	GUA-16G	GUA-16K	\$33
3/4"	0.79"	98' (30M)	GUA-20G	GUA-20K	\$40
1"	0.98"	98' (30M)	GUA-25G	GUA-25K	\$68
1-1/4"	1.25"	98' (30M)	GUA-32G	GUA-32K	\$95
1-1/2"	1.57"	98' (30M)	GUA-40G	GUA-40K	\$119
2"	1.97"	98' (30M)	GUA-50G	GUA-50K	\$155

Straight Liquid Tight Fittings

Nominal ID	Actual ID	Pcs/Pk	Gray	Black	Price
3/8"	0.47"	20	RA-12G	RA-12K	\$18
1/2"	0.63"	20	RA-16G	RA-16K	\$21
3/4"	0.79"	20	RA-20G	RA-20K	\$26
1"	0.98"	10	RA-25G	RA-25K	\$19
1-1/4"	1.25"	10	RA-32G	RA-32K	\$38
1-1/2"	1.57"	5	RA-40G	RA-40K	\$29
2"	1.97"	5	RA-50G	RA-50K	\$51

90° Liquid Tight Fittings

Nominal ID	Actual ID	Pcs/Pk	Gray	Black	Price
3/8"	0.47"	25	CUR-12G	CUR-12K	\$38
1/2"	0.63"	25	CUR-16G	CUR-16K	\$45
3/4"	0.79"	15	CUR-20G	CUR-20K	\$31
1"	0.98"	5	CUR-25G	CUR-25K	\$15
1-1/4"	1.25"	5	CUR-32G	CUR-32K	\$37

Gaskets

Nominal ID	Fits RA / CUR	Pcs/Pk	Part Number	Price
3/8"	12	25	GT-12	\$1.50
1/2"	16	25	GT-16	\$1.50
3/4"	20	25	GT-20	\$1.50
1"	25	20	GT-25	\$1.50
1-1/4"	32	20	GT-32	\$1.50
1-1/2"	40	10	GT-40	\$1.00
2"	50	10	GT-50	\$1.00

FREE Ground Shipping!* for online orders over \$500



WIRE DUCT


The panel building market has very specific needs. Betaduct is a unique cable management system developed specifically for use within cabinets and control panels. Betaduct is available in a number of different colors and sizes. Select Open, Narrow, Closed Slot, and Solid Wall (RaceWay) duct depending on your application.

Industrial Grade Material

- Made of self-extinguishing PVC
- UL94 Flammability rating V-0
- Service temperature 5°F to 140°F (-15°C to 60°C)
- UL, CSA, CE, and Lloyds Register approved

Score line

Fingers can be easily removed without the need for tools

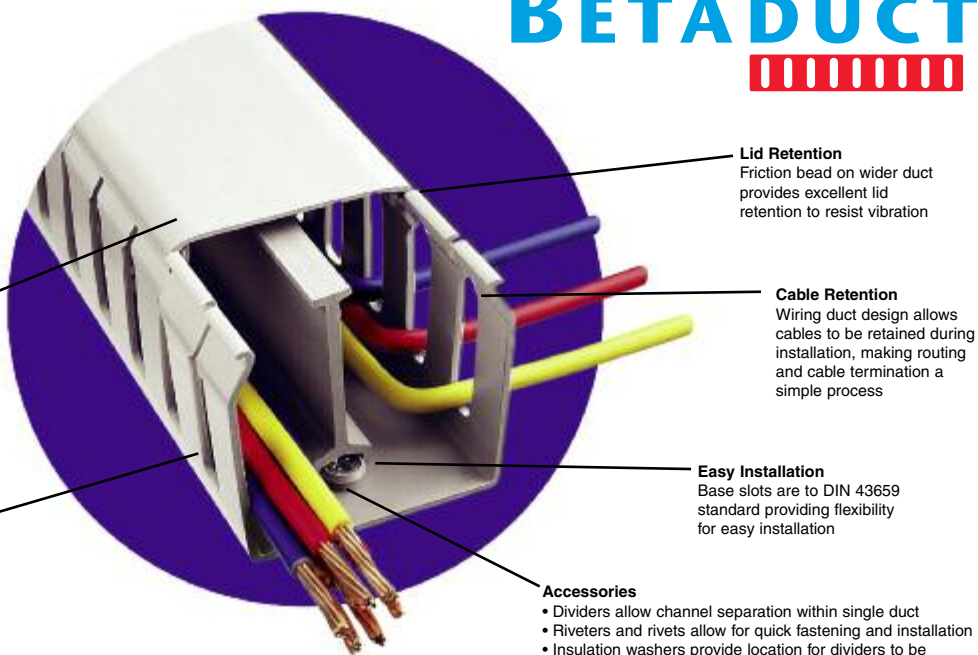


Lid Retention
Friction bead on wider duct provides excellent lid retention to resist vibration

Cable Retention
Wiring duct design allows cables to be retained during installation, making routing and cable termination a simple process

Easy Installation
Base slots are to DIN 43659 standard providing flexibility for easy installation

Accessories

- Dividers allow channel separation within single duct
- Riveters and rivets allow for quick fastening and installation
- Insulation washers provide location for dividers to be secured to base of wiring duct

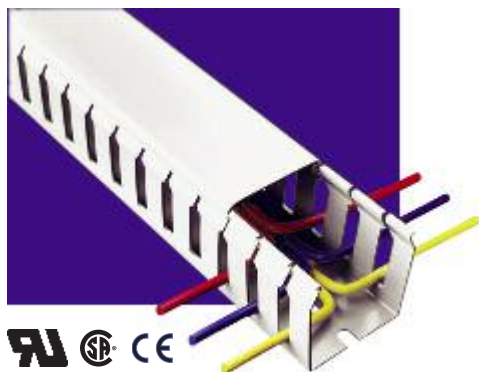

G-series Wide Slot Wiring Duct

- Wide fingers giving additional cable support
- Smooth edges for worry-free wiring and handling
- Terminated wires can be re-routed easily
- Scoreline at base of finger allows removal without the need for tools
- Made of self extinguishing rigid PVC
- UL94 Flammability rating V-0
- Service temperature 5°F to 140°F (-15°C to 60°C)
- 0.79" slot pitch, 0.31" slot width
- 23 sizes available in gray (RAL 7030), white, black, or blue
- Cover included with duct
- Dividers and many other optional accessories available

from **\$13.10** per stick

Size	External Dimensions		Carton Qty.		Gray		White		Black		Blue	
(W x H)	W in (mm)	H in (mm)	Lengths (6.5 ft.)	Total ft.	Part Number	Price	Part Number	Price	Part Number	Price	Part Number	Price
3/4" x 2"	0.98"(25)	2.09"(53)	12	78	BG.75X2LG6.5-C	\$168	BG.75X2WH6.5-C	\$168	BG.75X2BL6.5-C	\$168		
1" x 1 1/2"	1.14"(29)	1.61"(41)	12	78	BG1X1.5LG6.5-C	\$157	BG1X1.5WH6.5-C	\$157	BG1X1.5BL6.5-C	\$157		
1" x 2"	1.14"(29)	2.13"(54)	12	78	BG1X2LG6.5-C	\$170	BG1X2WH6.5-C	\$170	BG1X2BL6.5-C	\$170	BG1X2IB6.5-C	\$242
1" x 3"	1.14"(29)	3.11"(79)	8	52	BG1X3LG6.5-C	\$141	BG1X3WH6.5-C	\$141	BG1X3BL6.5-C	\$141	BG1X3IB6.5-C	\$197
1" x 4"	1.18"(30)	4.13"(105)	8	52	BG1X4LG6.5-C	\$164	BG1X4WH6.5-C	\$164	BG1X4BL6.5-C	\$164	BG1X4IB6.5-C	\$228
1 1/2" x 1 1/2"	1.61"(41)	1.61"(41)	12	78	BG1.5X1.5LG6.5-C	\$175	BG1.5X1.5WH6.5-C	\$175	BG1.5X1.5BL6.5-C	\$175		
1 1/2" x 2"	1.61"(41)	2.13"(54)	8	52	BG1.5X2LG6.5-C	\$133	BG1.5X2WH6.5-C	\$133	BG1.5X2BL6.5-C	\$133	BG1.5X2IB6.5-C	\$207
1 1/2" x 3"	1.54"(39)	3.11"(79)	8	52	BG1.5X3LG6.5-C	\$158	BG1.5X3WH6.5-C	\$158	BG1.5X3BL6.5-C	\$158	BG1.5X3IB6.5-C	\$238
1 1/2" x 4"	1.69"(43)	4.13"(105)	8	52	BG1.5X4LG6.5-C	\$176	BG1.5X4WH6.5-C	\$176	BG1.5X4BL6.5-C	\$176	BG1.5X4IB6.5-C	\$275
2" x 1"	2.13"(54)	1.10"(28)	12	78	BG2X1LG6.5-C	\$193	BG2X1WH6.5-C	\$193	BG2X1BL6.5-C	\$193		
2" x 1 1/2"	2.13"(54)	1.61"(41)	8	52	BG2X1.5LG6.5-C	\$130	BG2X1.5WH6.5-C	\$130	BG2X1.5BL6.5-C	\$130		
2" x 2"	2.13"(54)	2.13"(54)	8	52	BG2X2LG6.5-C	\$133	BG2X2WH6.5-C	\$133	BG2X2BL6.5-C	\$133	BG2X2IB6.5-C	\$186
2" x 3"	2.17"(55)	3.11"(79)	8	52	BG2X3LG6.5-C	\$164	BG2X3WH6.5-C	\$164	BG2X3BL6.5-C	\$164	BG2X3IB6.5-C	\$239
2" x 4"	2.20"(56)	4.13"(105)	4	26	BG2X4LG6.5-C	\$93	BG2X4WH6.5-C	\$93	BG2X4BL6.5-C	\$93	BG2X4IB6.5-C	\$138
3" x 1 1/2"	3.15"(80)	1.61"(41)	8	52	BG3X1.5LG6.5-C	\$164	BG3X1.5WH6.5-C	\$164	BG3X1.5BL6.5-C	\$164		
3" x 2"	3.07"(78)	2.13"(54)	8	52	BG3X2LG6.5-C	\$169	BG3X2WH6.5-C	\$169	BG3X2BL6.5-C	\$169		
3" x 3"	3.15"(80)	3.15"(80)	8	52	BG3X3LG6.5-C	\$198	BG3X3WH6.5-C	\$198	BG3X3BL6.5-C	\$198	BG3X3IB6.5-C	\$268
3" x 4"	3.15"(80)	4.13"(105)	4	26	BG3X4LG6.5-C	\$114	BG3X4WH6.5-C	\$114	BG3X4BL6.5-C	\$114	BG3X4IB6.5-C	\$158
4" x 2"	4.21"(107)	2.13"(54)	4	26	BG4X2LG6.5-C	\$98	BG4X2WH6.5-C	\$98	BG4X2BL6.5-C	\$98		
4" x 3"	4.21"(107)	3.15"(80)	4	26	BG4X3LG6.5-C	\$111	BG4X3WH6.5-C	\$111	BG4X3BL6.5-C	\$111	BG4X3IB6.5-C	\$175
4" x 4"	4.21"(107)	4.09"(104)	4	26	BG4X4LG6.5-C	\$130	BG4X4WH6.5-C	\$130	BG4X4BL6.5-C	\$130	BG4X4IB6.5-C	\$194
4" x 5"	4.21"(107)	5.12"(130)	4	26	BG4X5LG6.5-C	\$175	BG4X5WH6.5-C	\$175	BG4X5BL6.5-C	\$175		
5" x 3"	5.16"(131)	3.07"(78)	4	26	BG5X3LG6.5-C	\$172	BG5X3WH6.5-C	\$172	BG5X3BL6.5-C	\$172		


To order call **1.800.972.0436** or visit **factorymation.com**

No Games, No Gimmicks...

...Just Great Products at Great Prices!!!

F-series Narrow Slot Wiring Duct

from **\$13.10** per stick

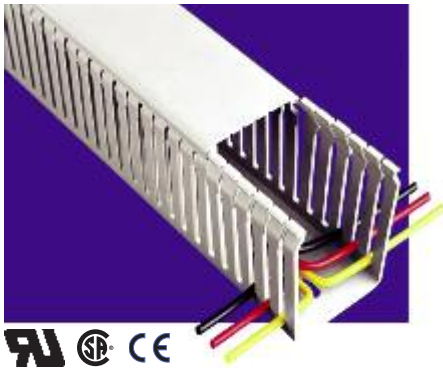


- Ideal for use with high-density narrow terminal blocks where more access is required
- Improve appearance of panels with cables out in best position
- Scoreline at base of finger allows removal without the need for tools
- Made of self extinguishing rigid PVC with UL94 Flammability rating V-0
- Service temp. 5°F to 140°F (-15°C to 60°C)
- 0.39" slot pitch, 0.16" slot width
- 20 sizes in gray (RAL 7030), white, or black
- Cover included with duct
- Dividers and many other accessories available

Size (W x H)	External Dimen.		Carton Qty.		Gray	White	Price
	W in (mm)	H in (mm)	Lengths (6.5 ft.)	Total ft.	Part Number	Part Number	
3/4" x 2"	0.98"(25)	2.09"(53)	12	78	BF.75X2LG6.5-C	BF.75X2WH6.5-C	\$168
1" x 1 1/2"	1.14"(29)	1.61"(41)	12	78	BF1X1.5LG6.5-C	BF1X1.5WH6.5-C	\$157
1" x 2"	1.14"(29)	2.13"(54)	12	78	BF1X2LG6.5-C	BF1X2WH6.5-C	\$170
1" x 3"	1.14"(29)	3.11"(79)	8	52	BF1X3LG6.5-C	BF1X3WH6.5-C	\$141
1" x 4"	1.18"(30)	4.13"(105)	8	52	BF1X4LG6.5-C	BF1X4WH6.5-C	\$164
1 1/2" x 1 1/2"	1.61"(41)	1.61"(41)	12	78	BF1.5X1.5LG6.5-C	BF1.5X1.5WH6.5-C	\$175
1 1/2" x 2"	1.61"(41)	2.13"(54)	8	52	BF1.5X2LG6.5-C	BF1.5X2WH6.5-C	\$133
1 1/2" x 3"	1.54"(39)	3.11"(79)	8	52	BF1.5X3LG6.5-C	BF1.5X3WH6.5-C	\$158
1 1/2" x 4"	1.69"(43)	4.13"(105)	8	52	BF1.5x4LG6.5-C	BF1.5x4WH6.5-C	\$176
2" x 1 1/2"	2.13"(54)	1.61"(41)	8	52	BF2X1.5LG6.5-C	BF2X1.5WH6.5-C	\$130
2" x 2"	2.13"(54)	2.13"(54)	8	52	BF2X2LG6.5-C	BF2X2WH6.5-C	\$133
2" x 3"	2.17"(55)	3.11"(79)	8	52	BF2X3LG6.5-C	BF2X3WH6.5-C	\$164
2" x 4"	2.20"(56)	4.13"(105)	4	26	BF2X4LG6.5-C	BF2X4WH6.5-C	\$93
3" x 1 1/2"	3.15"(80)	1.61"(41)	8	52	BF3X1.5LG6.5-C	BF3X1.5WH6.5-C	\$164
3" x 2"	3.07"(78)	2.13"(54)	8	52	BF3X2LG6.5-C	BF3X2WH6.5-C	\$169
3" x 3"	3.15"(80)	3.15"(80)	8	52	BF3X3LG6.5-C	BF3X3WH6.5-C	\$198
3" x 4"	3.15"(80)	4.13"(105)	4	26	BF3X4LG6.5-C	BF3X4WH6.5-C	\$114
4" x 2"	4.21"(107)	2.13"(54)	4	26	BF4X2LG6.5-C	BF4X2WH6.5-C	\$98
4" x 3"	4.21"(107)	3.15"(80)	4	26	BF4X3LG6.5-C	BF4X3WH6.5-C	\$111
4" x 4"	4.21"(107)	4.09"(104)	4	26	BF4X4LG6.5-C	BF4X4WH6.5-C	\$130

D-series Closed Slot Wiring Duct

from **\$14.75** per stick

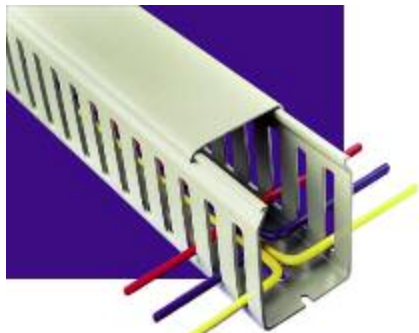


- Excellent cable retention
- Enhanced protection for installers
- Scoreline at base of finger allows removal without the need for tools
- Made of self extinguishing rigid PVC with UL94 Flammability rating V-0
- Service temp. 5°F to 140°F (-15°C to 60°C)
- 0.79" slot pitch, 0.31" slot width
- 25 sizes in gray (RAL 7030), white, or black
- Cover included with duct
- Dividers and many other accessories available

Size (W x H)	External Dimen.		Carton Qty.		Gray	White	Price
	W in (mm)	H in (mm)	Lengths (6.5 ft.)	Total ft.	Part Number	Part Number	
1/2" x 1/2"	0.67"(17)	0.67"(17)	24	156	BD.5X.5LG6.5-C	BD.5X.5WH6.5-C	\$354
3/4" x 2"	0.98"(25)	2.09"(53)	12	78	BD.75X2LG6.5-C	BD.75X2WH6.5-C	\$198
1" x 3/4"	1.14"(29)	0.91"(23)	12	78	BD1X.75LG6.5-C	BD1X.75WH6.5-C	\$193
1" x 1 1/2"	1.14"(29)	1.61"(41)	12	78	BD1X1.5LG6.5-C	BD1X1.5WH6.5-C	\$203
1" x 2"	1.14"(29)	2.13"(54)	12	78	BD1X2LG6.5-C	BD1X2WH6.5-C	\$217
1" x 3"	1.14"(29)	3.11"(79)	8	52	BD1X3LG6.5-C	BD1X3WH6.5-C	\$183
1" x 4"	1.18"(30)	4.13"(105)	8	52	BD1X4LG6.5-C	BD1X4WH6.5-C	\$211
1 1/2" x 1 1/2"	1.61"(41)	1.61"(41)	12	78	BD1.5X1.5LG6.5-C	BD1.5X1.5WH6.5-C	\$212
1 1/2" x 2"	1.61"(41)	2.13"(54)	8	52	BD1.5X2LG6.5-C	BD1.5X2WH6.5-C	\$196
1 1/2" x 3"	1.54"(39)	3.11"(79)	8	52	BD1.5X3LG6.5-C	BD1.5X3WH6.5-C	\$225
1 1/2" x 4"	1.69"(43)	4.13"(105)	8	52	BD1.5x4LG6.5-C	BD1.5x4WH6.5-C	\$224
2" x 1"	2.13"(54)	1.10"(28)	12	78	BD2X1LG6.5-C	BD2X1WH6.5-C	\$282
2" x 1 1/2"	2.13"(54)	1.61"(41)	8	52	BD2X1.5LG6.5-C	BD2X1.5WH6.5-C	\$177
2" x 2"	2.13"(54)	2.13"(54)	8	52	BD2X2LG6.5-C	BD2X2WH6.5-C	\$174
2" x 3"	2.17"(55)	3.11"(79)	8	52	BD2X3LG6.5-C	BD2X3WH6.5-C	\$222
2" x 4"	2.20"(56)	4.13"(105)	4	26	BD2X4LG6.5-C	BD2X4WH6.5-C	\$127
3" x 1 1/2"	3.15"(80)	1.61"(41)	8	52	BD3X1.5LG6.5-C	BD3X1.5WH6.5-C	\$215
3" x 2"	3.07"(78)	2.13"(54)	8	52	BD3X2LG6.5-C	BD3X2WH6.5-C	\$229
3" x 3"	3.15"(80)	3.15"(80)	8	52	BD3X3LG6.5-C	BD3X3WH6.5-C	\$249
3" x 4"	3.15"(80)	4.13"(105)	4	26	BD3X4LG6.5-C	BD3X4WH6.5-C	\$146
4" x 2"	4.21"(107)	2.13"(54)	4	26	BD4X2LG6.5-C	BD4X2WH6.5-C	\$139
4" x 3"	4.21"(107)	3.15"(80)	4	26	BD4X3LG6.5-C	BD4X3WH6.5-C	\$163
4" x 4"	4.21"(107)	4.09"(104)	4	26	BD4X4LG6.5-C	BD4X4WH6.5-C	\$180
4" x 5"	4.21"(107)	5.12"(130)	4	26	BD4X5LG6.5-C	BD4X5WH6.5-C	\$214
5" x 3"	5.16"(131)	3.07"(78)	4	26	BD5X3LG6.5-C	BD5X3WH6.5-C	\$188

FREE Ground Shipping!
for online orders over \$500



FS-series Raceway (Solid Wall)

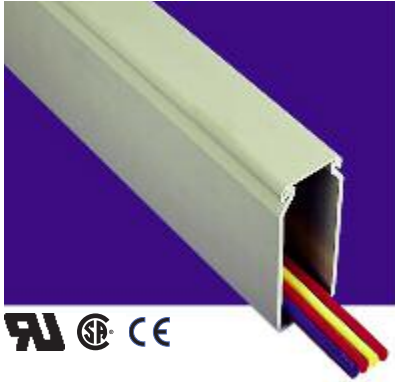


- Ideal where no break outs are required or side wall access is infrequent
- Complete cable protection
- Made of self extinguishing rigid PVC with UL94 Flammability rating V-0
- Service temp. 5°F to 140°F (-15°C to 60°C)
- 25 sizes in gray (RAL 7030), white, or black
- Cover included with duct
- Dividers and many other accessories available

from **\$14.75** per stick

Size (W x H)	External Dimen.		Carton Qty.		Gray	White	Black	Price
	W in (mm)	H in (mm)	Lengths (6.5 ft.)	Total ft.	Part Number	Part Number	Part Number	
1/2" x 1/2"	0.67"(17)	0.67"(17)	24	156	BFS.5X.5LG6.5NM-C	BFS.5X.5WH6.5NM-C	BFS.5X.5BL6.5NM-C	\$354
3/4" x 2"	0.98"(25)	2.09"(53)	12	78	BFS.75X2LG6.5NM-C	BFS.75X2WH6.5NM-C	BFS.75X2BL6.5NM-C	\$198
1" x 3/4"	1.14"(29)	0.91"(23)	12	78	BFS1X.75LG6.5NM-C	BFS1X.75WH6.5NM-C	BFS1X.75BL6.5NM-C	\$193
1" x 1 1/2"	1.14"(29)	1.61"(41)	12	78	BFS1X1.5LG6.5NM-C	BFS1X1.5WH6.5NM-C	BFS1X1.5BL6.5NM-C	\$203
1" x 2"	1.14"(29)	2.13"(54)	12	78	BFS1X2LG6.5NM-C	BFS1X2WH6.5NM-C	BFS1X2BL6.5NM-C	\$217
1" x 3"	1.14"(29)	3.11"(79)	8	52	BFS1X3LG6.5NM-C	BFS1X3WH6.5NM-C	BFS1X3BL6.5NM-C	\$183
1" x 4"	1.18"(30)	4.13"(105)	8	52	BFS1X4LG6.5NM-C	BFS1X4WH6.5NM-C	BFS1X4BL6.5NM-C	\$211
1 1/2"x1 1/2"	1.61"(41)	1.61"(41)	12	78	BFS1.5X1.5LG6.5NM-C	BFS1.5X1.5WH6.5NM-C	BFS1.5X1.5BL6.5NM-C	\$212
1 1/2" x 2"	1.61"(41)	2.13"(54)	8	52	BFS1.5X2LG6.5NM-C	BFS1.5X2WH6.5NM-C	BFS1.5X2BL6.5NM-C	\$196
1 1/2" x 3"	1.54"(39)	3.11"(79)	8	52	BFS1.5X3LG6.5NM-C	BFS1.5X3WH6.5NM-C	BFS1.5X3BL6.5NM-C	\$225
1 1/2" x 4"	1.69"(43)	4.13"(105)	8	52	BFS1.5x4LG6.5NM-C	BFS1.5x4WH6.5NM-C	BFS1.5x4BL6.5NM-C	\$224
2" x 1"	2.13"(54)	1.10"(28)	12	78	BFS2X1LG6.5NM-C	BFS2X1WH6.5NM-C	BFS2X1BL6.5NM-C	\$282
2" x 1 1/2"	2.13"(54)	1.61"(41)	8	52	BFS2X1.5LG6.5NM-C	BFS2X1.5WH6.5NM-C	BFS2X1.5BL6.5NM-C	\$177
2" x 2"	2.13"(54)	2.13"(54)	8	52	BFS2X2LG6.5NM-C	BFS2X2WH6.5NM-C	BFS2X2BL6.5NM-C	\$174
2" x 3"	2.17"(55)	3.11"(79)	8	52	BFS2X3LG6.5NM-C	BFS2X3WH6.5NM-C	BFS2X3BL6.5NM-C	\$222
2" x 4"	2.20"(56)	4.13"(105)	4	26	BFS2X4LG6.5NM-C	BFS2X4WH6.5NM-C	BFS2X4BL6.5NM-C	\$127
3" x 1 1/2"	3.15"(80)	1.61"(41)	8	52	BFS3X1.5LG6.5NM-C	BFS3X1.5WH6.5NM-C	BFS3X1.5BL6.5NM-C	\$215
3" x 2"	3.07"(78)	2.13"(54)	8	52	BFS3X2LG6.5NM-C	BFS3X2WH6.5NM-C	BFS3X2BL6.5NM-C	\$229
3" x 3"	3.15"(80)	3.15"(80)	8	52	BFS3X3LG6.5NM-C	BFS3X3WH6.5NM-C	BFS3X3BL6.5NM-C	\$249
3" x 4"	3.15"(80)	4.13"(105)	4	26	BFS3X4LG6.5NM-C	BFS3X4WH6.5NM-C	BFS3X4BL6.5NM-C	\$146
4" x 2"	4.21"(107)	2.13"(54)	4	26	BFS4X2LG6.5NM-C	BFS4X2WH6.5NM-C	BFS4X2BL6.5NM-C	\$139
4" x 3"	4.21"(107)	3.15"(80)	4	26	BFS4X3LG6.5NM-C	BFS4X3WH6.5NM-C	BFS4X3BL6.5NM-C	\$163
4" x 4"	4.21"(107)	4.09"(104)	4	26	BFS4X4LG6.5NM-C	BFS4X4WH6.5NM-C	BFS4X4BL6.5NM-C	\$180
4" x 5"	4.21"(107)	5.12"(130)	4	26	BFS4X5LG6.5NM-C	BFS4X5WH6.5NM-C	BFS4X5BL6.5NM-C	\$214
5" x 3"	5.16"(131)	3.07"(78)	4	26	BFS5X3LG6.5NM-C	BFS5X3WH6.5NM-C	BFS5X3BL6.5NM-C	\$188

Betaduct Accessories

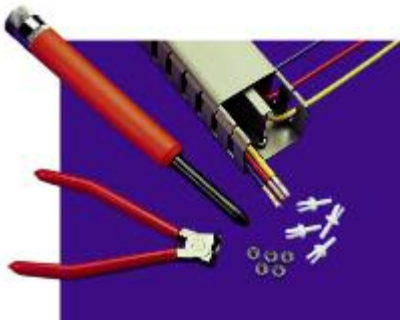

Spare Cover

Size (W x H)	Carton Qty.		Gray	White	Black	Blue	Price
	Lengths (6.5 ft.)	Total ft.	Part Number	Part Number	Part Number	Part Number	
1/2"	12	78	BC.5LG6.5	BC.5WH6.5	BC.5BL6.5	N/A	\$50
3/4"	12	78	BC.75LG6.5	BC.75WH6.5	BC.75BL6.5	N/A	\$61
1"	12	78	BC1LG6.5	BC1WH6.5	BC1BL6.5	BC11B6.5	\$65
1 1/2"	12	78	BC1.5LG6.5	BC1.5WH6.5	BC1.5BL6.5	BC1.51B6.5	\$69
2"	12	78	BC2LG6.5	BC2WH6.5	BC2BL6.5	BC21B6.5	\$88
3"	12	78	BC3LG6.5	BC3WH6.5	BC3BL6.5	BC31B6.5	\$120
4"	6	39	BC4LG6.5	BC4WH6.5	BC4BL6.5	BC41B6.5	\$83
5"	6	39	BC5LG6.5	BC5WH6.5	BC5BL6.5	N/A	\$102

Dividers

P/N	Description	Carton Qty.	Price
BD2LG6.5	2" Divider, 6.5 feet length, Gray	4	\$73
BD2BL6.5	2" Divider, 6.5 feet length, Black	4	\$73
BD3LG6.5	3" Divider, 6.5 feet length, Gray	4	\$80
BD3BL6.5	3" Divider, 6.5 feet length, Black	4	\$80

Washers / Rivets / Tools

P/N	Description	Carton Qty.	Price
BW-1	Insulating Washers	50	\$25
BR-1	Rivets (Small) - 1/2" W Duct	100	\$21
BR-2	Rivets (Large) - 3/4" W - 5"W Duct	100	\$42
BSC-1	Side Cutter	1	\$250
BRV-1	5.5mm Rivet Tool	1	\$87